



PRODUCT DATA SHEET- SQUARE RECESS SERIES
GVE OVERSEAS PVT.LTD

DOC No.: GVE/PDS/SRSE/01, Issue No: 01, Revision No: 01, Dated: 01/04/2020

PRODUCT DATA

Commercial-grade, recessed, with New generation styling and high visual comfort feature, flat PC diffuser indoor applications where low-glare high-quality LED light.

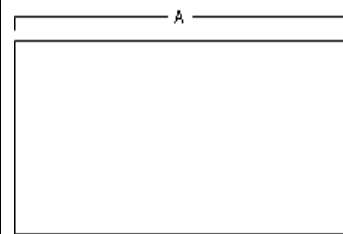
FEATURES	APPLICATIONS	PICTORIAL IMAGE
<ul style="list-style-type: none"> Flat Design Enhanced, uniform lighting PC lens Standard low voltage DC 80+ CRI Available in different configurations For use in recess ceilings Easy maintenance from front side 	<ul style="list-style-type: none"> Office Areas Retail Stores Classrooms Hospitals Nursing Homes <p>ADDITIONAL OPTIONS</p> <ul style="list-style-type: none"> Emergency lighting battery pack 	

OPTICAL SYSTEM

Round linear ribbed frosted acrylic diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.

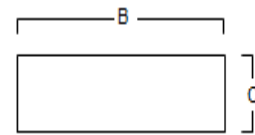
DIMENSIONS

Top View



ELECTRICAL	WARRANTY
<ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>

End View



HOUSING MATERIAL/FINISH	MOUNTING
<ul style="list-style-type: none"> Mild steel housing. CRCA Sheet White, polyester powder painted housing. 	<p>This luminaire has been provided. Holes for chain-mounting support to building structure</p>

DIMENSION TABLE-MODEL WISE FOR CUTOUT

Model SQ SR	Watt	Overall Dimension in MM	A	B	C
GVE-1200x1200	60-80	1195x1195x60	1150	1150	60
GVE -900x900	60-80	895x895x60	850	850	60
GVE-750x750	40-60	745x745-60	650	650	60
GVE-600x600	33-48	595x595-60	545	545	60

ORDER CODES - MODEL WISE Example - GVE-600x600 - 48 Watt

Working temperature	TJ	Output LUMEN	CC mA	VOLTAGE AC-In	VOLTAGE DC-Out
-5 to 40 °	85	6600-8800	800-1000	185-275	48-60
-5 to 40 °	85	6600-8800	800-1000	185-275	48-60
-5 to 40 °	85	4400-6600	600-850	185-275	48-60
-5 to 40 °	85	3300-5200	600-850	185-275	48-60
IP	Lumen / watt	EFFICACY %	CRI	CCT	
20	140	80	80>	3500	4000 5500




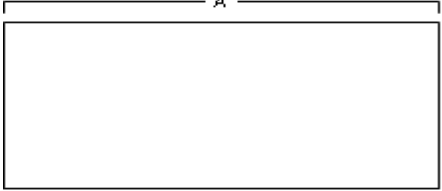
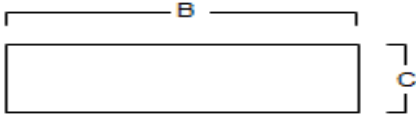


GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- LED FLOOD LIGHT SERIES

Spec sheet Documents GVE Box Exit Sign
 /A-51 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Box type LED Exit sign for indoor applications high-quality LED light.

<p>Glass Exit Design Surface / Wall mounted Easy maintenance</p>	<p>APPLICATIONS Corridor Exit door Path for exit</p>	<p>PICTORIAL IMAGE</p> 
<p>OPTICAL SYSTEM LED light back side of the Glass offers high levels of efficiency and visual comfort. Soft, low glare, indirect illumination light distribution.</p>		<p>DIMENSIONS Top View</p> 
<p>ELECTRICAL • Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. • Rated to deliver LM80 Performance > 50,000 hours</p>	<p>WARRANTY 2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	<p>End View</p> 
<p>HOUSING MATERIAL/FINISH • Aluminum housing. • Glass toughened • Polyester powder painted housing. • Mounting arrangement order separately if required</p>	<p>Data</p> <ul style="list-style-type: none"> • High glow led • 90 minute battery backup. <p>Emergency lighting system complete with Battery, Charger inbuilt backup EXIT display optional light off when power on light will on when power off</p>	

GVE Order Code No	A Length	B-Width	C- Height	Color	Watt	TJ	Emergency backup e
GVE EMG 2x10 W Emergency Exit	380	185	110	Black/ White	10	80	90 Minute

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	90	Less 20 %	20	Lens & MS	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS





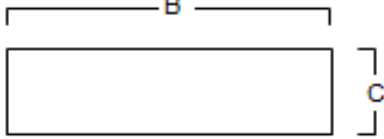


GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET LINEAR RECESS SERIES

DOC No.: GVE/PDS/SRSE/02, Issue No: 02, Revision No: 01, Dated: 01/04/2020

PRODUCT DATA

Commercial-grade, recessed, with New generation styling and high visual comfort feature, flat PC diffuser indoor applications where low-glare high-quality LED light.

<p align="center">FEATURES</p> <ul style="list-style-type: none"> Flat Design Enhanced, uniform lighting PC lens Standard low voltage DC 80+ CRI Available in 4x1 configurations For use in recess ceilings Easy maintenance from front side 	<p align="center">APPLICATIONS</p> <ul style="list-style-type: none"> Office Areas Retail Stores Classrooms Hospitals Nursing Homes <p align="center">ADDITIONAL OPTIONS</p> <ul style="list-style-type: none"> Emergency lighting battery pack 	<p align="center">PICTORIAL IMAGE</p> 
<p align="center">OPTICAL SYSTEM</p> <p>Round linear ribbed frosted acrylic diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>		<p align="center">DIMENSIONS</p> <p align="center">Top View</p> 
<p align="center">ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers Rated to deliver LM80 Performance > 50,000 hours 	<p align="center">WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	<p align="center">End View</p> 
<p align="center">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Mild steel housing. CRCA Sheet White, polyester powder painted housing. 	<p align="center">MOUNTING</p> <p>This luminaire has been provided. Holes for chain-mounting support to building structure</p>	

Order Code	Watt	A Length	B-Width	C -Height	Price
GVE 1500x300	60	1450	250	70	9000
GVE 1400x300	60	1350	250	70	8500
GVE 1200x300	48	1150	250	70	7500
GVE 900x300	40	850	250	70	7000
GVE 1500x150	40	1170	120	95	8500
GVE 1400x150	40	1370	120	95	8000
GVE 1200x150	40	1170	120	95	7000
GVE 900x150	30	870	120	95	6500
GVE 600x150	30	570	120	95	6000
GVE 550x150	30	520	120	95	5500

Description TABLE-MODEL WISE

CRI	EFFICACY %	LUMEN / Watt	CCT	VOLTAGE AC-In	
80	80	130	5700,4000,3000	185-275	

REGISTRATIONS & APPROVALS




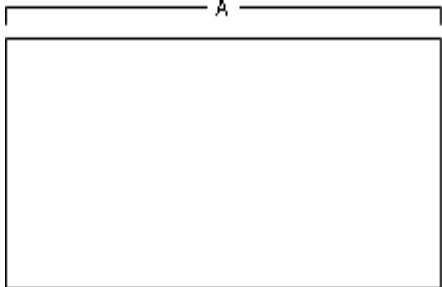
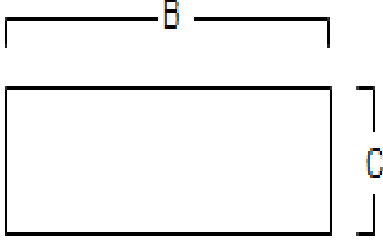


GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET LINEAR SURFACE SERIES

39 4x1 Surface / Hanging 120-150 - DOC No.: GVE Surface /Hanging A-61
Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Commercial-grade, recessed, with New generation styling and high visual comfort feature, flat PC diffuser indoor applications where low-glare high-quality LED light.

<p align="center">FEATURES</p> <ul style="list-style-type: none"> Flat Design Enhanced, uniform lighting PC lens Standard low voltage DC 80+ CRI Available in 4x1 configurations For use in recess ceilings Easy maintenance from front side 	<p align="center">APPLICATIONS</p> <ul style="list-style-type: none"> Office Areas Retail Stores Classrooms Hospitals Nursing Homes <p align="center">ADDITIONAL OPTIONS</p> <ul style="list-style-type: none"> Emergency lighting battery pack 	<p align="center">PICTORIAL IMAGE</p> 
<p align="center">OPTICAL SYSTEM</p> <p>Round linear ribbed frosted acrylic diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>		<p align="center">DIMENSIONS</p> <p align="center">Top View</p> 
<p align="center">ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p align="center">WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
<p align="center">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Mild steel housing. CRCA Sheet White, polyester powder painted housing. 	<p align="center">MOUNTING</p> <p>This luminaire has been provided. Holes for chain-mounting support to building structure</p>	<p align="center">End View</p> 

Order Code	Watt	A Length	B-Width	C -Height	Price
GVE SUR 1200x300-120	120	1200	300	70	9500
GVE SUR 1200x300-120	120	1200	300	70	7500

Description TABLE-MODEL WISE

EFFICACY %	CRI	LUMEN / watt	CCT	CCT	CCT
80 %	80	130	3000	4000	5700

REGISTRATIONS & APPROVALS



GREEN VISIONS ENTERPRISES

Sahibabad, Ghaziabad

E-mail : gvelighting@gmail.com, Website: www.greenvisionsenterprises.co.in


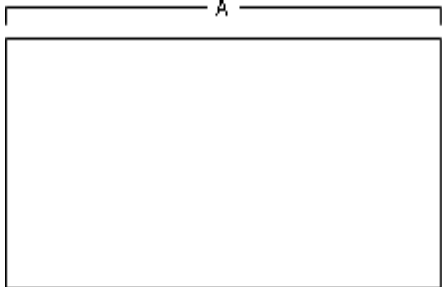
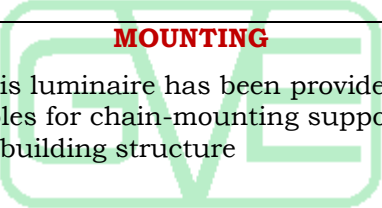
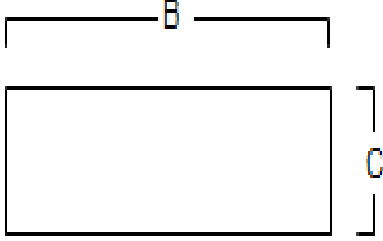


GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET LINEAR SURFACE SERIES

DOC No.: GVE/PDS/SRSE/02, Issue No: 02, Revision No: 01, Dated: 01/04/2020

PRODUCT DATA

Commercial-grade, recessed, with New generation styling and high visual comfort feature, flat PC diffuser indoor applications where low-glare high-quality LED light.

<p align="center">FEATURES</p> <ul style="list-style-type: none"> • Flat Design • Enhanced, uniform lighting • PC lens • Standard low voltage DC • 80+ CRI • Available in 4x1 configurations • For use in recess ceilings • Easy maintenance from front side 	<p align="center">APPLICATIONS</p> <ul style="list-style-type: none"> • Office Areas • Retail Stores • Classrooms • Hospitals • Nursing Homes <p align="center">ADDITIONAL OPTIONS</p> <ul style="list-style-type: none"> • Emergency lighting battery pack 	<p align="center">PICTORIAL IMAGE</p> 
<p align="center">OPTICAL SYSTEM</p> <p>Round linear ribbed frosted acrylic diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>		<p align="center">DIMENSIONS</p> <p align="center">Top View</p> 
<p align="center">ELECTRICAL</p> <ul style="list-style-type: none"> • Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. • Rated to deliver LM80 Performance > 50,000 hours 	<p align="center">WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
<p align="center">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> • Mild steel housing. • CRCA Sheet • White, polyester powder painted housing. 	<p align="center">MOUNTING</p> <p>This luminaire has been provided. Holes for chain-mounting support to building structure</p> 	
		<p align="center">End View</p> 

Order Code	Watt	A Length	B-Width	C -Height	Price
GVE SUR 1500x300	60	1500	300	70	9000
GVE SUR 1400x300	60	1400	300	70	8500
GVE SUR 1200x300	48	1200	300	70	7500
GVE SUR 900x300	40	900	300	70	7000
GVE SUR 700x150	30	700	300	70	6500
GVE SUR 1500x150	40	1500	150	70	8500
GVE SUR 1400x150	40	1400	150	70	8000
GVE SUR 1200x150	40	1200	150	70	7000
GVE SUR 900x150	30	900	150	70	6500
GVE SUR 600x150	30	600	150	70	6000
GVE SUR 550x150	30	550	150	70	5500



GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET LINEAR SURFACE SERIES

DOC No.: GVE/PDS/SRSE/02, Issue No: 02, Revision No: 01, Dated: 01/04/2020

Description TABLE-MODEL WISE

Model SQ SR	MODEL NUMBER	LUMEN	CC mA	VOLTAGE AC-In	VOLTAGE DC-Out	
		5700-7200	800-1000	185-275	48-60	
		5700-7200	800-1000	185-275	48-60	
		5700-7200	800-1000	185-275	48-60	
		5700-7200	800-1000	185-275	48-60	
		5700-7200	800-1000	185-275	48-60	
		5700-7200	800-1000	185-275	48-60	
		3600-5700	600-850	185-275	48-60	
		3600-5700	600-850	185-275	48-60	
		3600-5700	600-850	185-275	48-60	
		3600-5700	600-850	185-275	48-60	
		3600-5700	600-850	185-275	48-60	
		EFFICACY %	CRI	CCT		
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500
		80	80>	3500	4000	5500

REGISTRATIONS & APPROVALS






GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

1- Spec sheet Documents GVE COB LED Cylindrical Down Light Outdoor IP -65
 /A-40 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Spec sheet Documents GVE COB LED Cylindrical Down Light Outdoor IP -65

<p>Up Light Design</p> <ul style="list-style-type: none"> Enhanced, uniform lighting 80+ CRI, Available in wall mounted watt depend on size configurations IP-65 	<p>APPLICATIONS INDOOR</p> <ul style="list-style-type: none"> Lobby Garden Outdoor Application 	<p>PICTORIAL IMAGE</p> 
---	--	---

OPTICAL SYSTEM

Offers high levels of efficiency and visual comfort.direct reflectors are precision formed and contoured while maintaining high-efficiency and a wide, uniform light distribution..

<p>ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>WARRANTY</p> <p>1 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>
--	--

<p>HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Powder coted 	<p>MOUNTING</p> <p>Wall mounted available</p>
---	--

GVE Order Code No	Dia	Height	Watt	Price	CCT	CCT	CCT
GVE UP DOWN 3 W -65	50	150	3	1290	3000	4000	6000
GVE UP DOWN 6 W-65	50	150	6	1690	3000	4000	6000
GVE UP DOWN 12 W-65	50	150	12	2090	3000	4000	6000
GVE UP DOWN 15 W-65	75	150	15	2990	3000	4000	6000
GVE UP DOWN 20 W-65	75	200	20	3999	3000	4000	6000
GVE UP DOWN 24 W-65	100	200	24	4790	3000	4000	6000
GVE UP DOWN 30 W-65	100	250	30	5790	3000	4000	6000
GVE UP DOWN 36 W-65	150	300	36	7600	3000	4000	6000
GVE UP DOWN 50 W-65	150	450	50	8900	3000	4000	6000

nput AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	45	Less 20 %	20	Aluminum	50000 Hour	Seoul /edison





GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

1- Spec sheet Documents GVE Stadium Light 400 W IP -65
 /A-42 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

LED Street light with Frame outdoor applications high-quality LED light.

<p>Wall / Pole Mounted</p> <ul style="list-style-type: none"> Enhanced, uniform lighting Standard low voltage DC 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200 Watt configurations For use Pole and wall mounting Easy maintenance 	<p>APPLICATIONS</p> <ul style="list-style-type: none"> Farm House Park Outdoor Application Stadium etc 	<p>PICTORIAL IMAGE</p> 
<p>OPTICAL SYSTEM</p> <p>High levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>		
<p>ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
<p>HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Polyester powder painted housing. Mounting arrangement order separately if required 	<p>MOUNTING</p> <p>This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required</p> 	

GVE Order Code No	Dia	Width	Height	Watt	TJ	Environment	Price
GVE-400 W Stadium	420	380	450	400	75	Green ECO	24500

Input AC	Power Factor	Lumen / watt	Beam Angle	Hamonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD

PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

1- Spec sheet Documents GVE LED Bulb PC Non warranty
/A-22 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

LED Bulb indoor applications high-quality LED light.

LED Bulb

- Enhanced, uniform lighting
- 80+ CRI, Available Surface mounted 9-40 watt depend on size configurations

APPLICATIONS INDOOR

- Home
- Corridor

PICTORIAL IMAGE



OPTICAL SYSTEM

Fostered PC diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, while maintaining high-efficiency and a wide, uniform light distribution..

ALL DIMENSIONS IN MM

ELECTRICAL

- Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination.
- Rated to deliver LM80 Performance > 50,000 hours

WARRANTY

1 year limited warranty.
Visit our site as below:
www.greenvisionsenterprises.co.in

HOUSING MATERIAL/FINISH

- Aluminum & PC housing.
- PC Diffuser

MOUNTING

Surface

GVE Order Code No	Dia MM	Height MM	Watt	Price			
GVE- 7 W Bulb	57		7	110			
GVE- 9 W Bulb	57		9	150			
GVE -12 W Bulb	57		12	225			

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	45	Less 20 %	20	Aluminum	50000 Hour	Seoul /Edison

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

29 Spec sheet Documents GVE COB Small Spot light
/A-45 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

LED Round COB Small Spot light indoor applications high-quality LED light.

<p>Recess Spot Design</p> <ul style="list-style-type: none"> Enhanced, uniform lighting 80+ CRI, Available in recessed mounted 10 – 40 watt / meter depend on size configurations 	<p>APPLICATIONS INDOOR</p> <ul style="list-style-type: none"> Office Areas Retail Stores Classrooms Hospitals Nursing Homes 	<p>PICTORIAL IMAGE</p>
--	---	-------------------------------

<p>OPTICAL SYSTEM</p> <p>Offers high levels of efficiency and visual comfort. Direct reflectors are precision formed and contoured while maintaining high-efficiency and a wide, uniform light distribution.</p>	
---	--

<p>ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>
--	--

<p>HOUSING MATERIAL/ FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Powder coted 	<p>MOUNTING</p> <p>Recess mount available</p>
--	--

GVE Order Code No	Dia Cutout	Height	Watt	CCT	CCT	CCT	Price
GVE SM COB COBDEEP 7	95	73	7	3000	4000	6000	960
GVE SM COB COBDEEP 10	95	73	10	3000	4000	6000	1110
GVE SM COB COBDEEP 20	95	90	20	3000	4000	6000	1690
GVE SM COB COBDEEP 30	95	110	30	3000	4000	6000	2190

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Color	Expected Life	LED Make
230	.90	140	45	Less 20 %	20	Aluminum	Black/ White	50000 Hour	Seoul / Edison

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD

PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

1- Spec sheet Documents details GVE COB Round Spot Light /A-19 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

LED Round COB Spot light indoor applications high-quality LED light.

Recess Spot Design

- Enhanced, uniform lighting
- 80+ CRI, Available in recessed mounted 10 – 40 watt / meter depend on size configurations

APPLICATIONS INDOOR

- Office Areas
- Retail Stores
- Classrooms
- Hospitals
- Nursing Homes

PICTORIAL IMAGE



OPTICAL SYSTEM

Offers high levels of efficiency and visual comfort. direct reflectors are precision formed and contoured while maintaining high-efficiency and a wide, uniform light distribution..

ELECTRICAL

- Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination.
- Rated to deliver LM80 Performance > 50,000 hours

WARRANTY

2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in

HOUSING MATERIAL/FINISH

- Aluminum housing.
- Powder coated

MOUNTING

Recess mount available

GVE Order Code No	Dia Cutout	Height	Watt				
GVE HRCOB 68 MM	50	30	6				
GVE HRCOB 88 MM	70	62	10				
GVE HRCOB 88 MM	70	80	15				
GVEHRCOB110 MM	85	80	18				
GVE HRCOB 110 MM	85	95	20				
GVE HRCOB 140 MM	110	85	25				
GVE HRCOB 140 MM	110	124	30				
GVE HRCOB 160 MM	135	124	40				
GVE HRCOB 180 MM	155	120	50				

nput AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	45	Less 20 %	20	Aluminum	50000 Hour	Seoul /edison

Registration And Approvals





GVE OVERSEAS PVT.LTD

PRODUCT DATA SHEET- CONCEAL ROUND LED DOWN LIGHT SERIES

1- Spec sheet Documents GVE Round Conceal Recess LED Down light /A-26 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Round Conceal LED Indoor Down light applications high-quality LED light.

Round LED down Light

- Enhanced, uniform lighting
- 80+ CRI, Available recess mounted 7watt depend on size configurations

APPLICATIONS INDOOR

- Home ,Corridor ,Office, Hotel, Banquet and Many more

PICTORIAL IMAGE



OPTICAL SYSTEM

Posted PC diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, while maintaining high-efficiency and a wide, uniform light distribution.



ELECTRICAL

- Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination.
- Rated to deliver LM80 Performance > 50,000 hours

WARRANTY

Limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in

HOUSING MATERIAL/FINISH

- PC housing.
- PC Diffuser

MOUNTING

Recess

GVE Order Code No	Overall Dia MM	Cut out Dia	Height	Watt	Price		
GVE 7 W DL Flat	110	80	55	7	240		
GVE 7 W DL Ring	110	80	55	7	260		
GVE 7 W DL Joy	110	60	75	7	250		
GVE 7 W REC	110	80	55	7	240		

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	45	Less 20 %	20	Aluminum	50000 Hour	Seoul /Edison

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD

PRODUCT DATA SHEET- DEEP Recess ROUND LED DOWN LIGHT SERIES

1- Spec sheet Documents GVE Round Deep Recess LED Down light
/A-25 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Round Deep Recess LED Indoor Down light applications high-quality LED light.

Round LED down Light

- Enhanced, uniform lighting
- 80+ CRI, Available recess mounted 6,12,18 & 24 watt depend on size configurations

APPLICATIONS INDOOR

- Home ,Corridor ,Office, Hotel, Banquet and Many more

PICTORIAL IMAGE



OPTICAL SYSTEM

Posted PC diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, while maintaining high-efficiency and a wide, uniform light distribution.

ELECTRICAL

- Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination.
- Rated to deliver LM80 Performance > 50,000 hours

WARRANTY

2 year limited warranty.
Visit our site as below:
www.greenvisionsenterprises.co.in

HOUSING MATERIAL/FINISH

- Aluminum housing.
- PC Diffuser

MOUNTING

Recess

GVE Order Code No	Overall Dia MM	Cut out Dia	Height	Watt	Price		
GVE DEEP REC -DL ALM 15	130	110	66	15	650		
GVE DEEP REC -DL ALM 20	130	110	66	20	1050		
GVE DEEP REC -DL ALM 25	160	130	66	25	1690		
GVE DEEP REC -DL ALM 30	160	130	75	30	2290		

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	45	Less 20 %	20	Aluminum	50000 Hour	Seoul /Edison

REGISTRATIONS & APPROVALS



GVE OVERSEAS PVT.LTD


PRODUCT DATA SHEET- DEEP Recess ROUND LED DOWN LIGHT SERIES



69 Spec sheet Documents Spec sheet Documents GVE Round Deep Recess without Reflector LED Down light /A-69 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Round Deep Recess LED Indoor Down light applications high-quality LED light.

<p style="text-align: center;">Round LED down Light</p> <ul style="list-style-type: none"> • Enhanced, uniform lighting • 80+ CRI, Available recess mounted 6,12,18 & 24 watt depend on size configurations 	<p style="text-align: center;">APPLICATIONS INDOOR</p> <ul style="list-style-type: none"> • Home ,Corridor ,Office, Hotel, Banquet and Many more 	<p style="text-align: center;">PICTORIAL IMAGE</p> <div style="text-align: center;">  </div>
--	--	--

<p style="text-align: center;">OPTICAL SYSTEM</p> <p>Posted PC diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, while maintaining high-efficiency and a wide, uniform light distribution.</p>

<p style="text-align: center;">ELECTRICAL</p> <ul style="list-style-type: none"> • Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. • Rated to deliver LM80 Performance > 50,000 hours CRI- 90 + 	<p style="text-align: center;">WARRANTY</p> <p>2 year limited warranty. With Driver 5 Year warranty with driver Less design</p>
--	--

<p style="text-align: center;">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> • Aluminum housing. • PC Diffuser 	<p style="text-align: center;">MOUNTING</p> <p style="text-align: center;">Recess</p>
--	--

GVE Order Code No	Overall Dia MM	Cut out Dia	Height	Watt	Price		
GVE DEEP REC WR -DL ALM 15	150	125	60	15	1150		
GVE DEEP REC WR -DL ALM 20	150	125	60	20	1490		
GVE DEEP REC WR -DL ALM 25	175	150	60	25	2150		
GVE DEEP REC WR -DL ALM 30	175	150	75	30	2800		

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.95	130	120	Less 20 %	20	Aluminum	50000 Hour	Seoul /Edison

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET RGB LED FLOOD LIGHT SERIES

DOC No.: GVE RGB FL A-57 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

RGB LED Flood light Back Choke LED Flood light with Frame outdoor applications high-quality LED light.

Box Type Design

- Enhanced, uniform lighting
- Standard low voltage DC
- 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200 Watt configurations For use in bracket/wall mounting Easy maintenance

APPLICATIONS

- Farm House
- Park
- Outdoor Application
- Stadium
- Warehouse etc and many more



PICTORIAL IMAGE

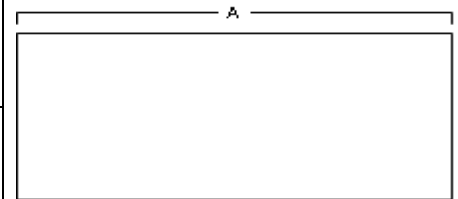


OPTICAL SYSTEM

Front cover toughened glass offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.

DIMENSIONS

Top View



ELECTRICAL

- Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination.
- Rated to deliver LM80 Performance > 50,000 hours



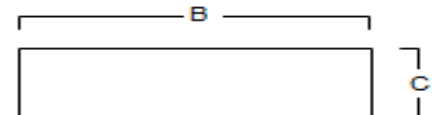
HOUSING MATERIAL/FINISH

- Aluminum housing.
- Glass toughened
- Polyester powder painted housing.
- Mounting arrangement order separately if required

MOUNTING

This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required

End View



GVE Order Code No	A Length	B-Width	C- Height	Weight	Watt	TJ	Environment
GVE,50WFL C/AVD	210	175	110	1.8	50	75	Green ECO
GVE,60WFL C/AVD	210	175	110	1.8	60	75	Green ECO
GVE100WFL C/AVD	275	225	150	3.0	100	80	Green ECO
GVE150WFLC/AVD	330	180	175	6.1	150	80	Green ECO
GVE200WFL C/AVD	330	180	175	6.1	200	80	Green ECO

Input AC	Power Factor	Lumen / watt	Beam Angle	Hamonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram





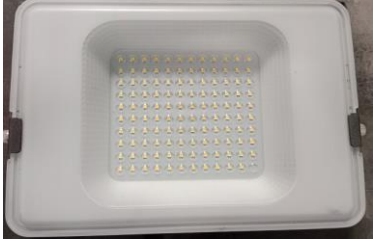
GVE OVERSEAS PVT.LTD

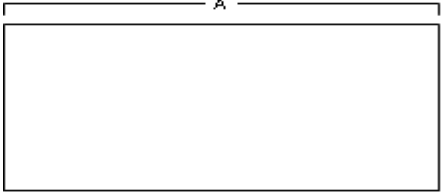
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

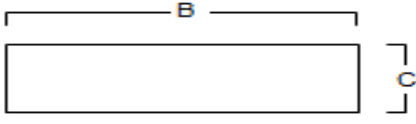
50 A-65 ECO FL BN MM Issue No: 01, Revision No: 02, Dated: 01/08/2022

PRODUCT DATA

LED Flood light Sleek Model Down Choke with Frame outdoor applications high-quality LED light.

FEATURES	APPLICATIONS	PICTORIAL IMAGE
<ul style="list-style-type: none"> Flat Design Enhanced, uniform lighting Standard low voltage DC 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200 Watt configurations For use in bracket/wall mounting Easy maintenance 	<ul style="list-style-type: none"> Farm House Park Outdoor Application Stadium 	

ELECTRICAL	WARRANTY	DIMENSIONS
<p>OPTICAL SYSTEM</p> <p>Front cover toughened glass offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>	<p>Limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	<p>Top View</p> 
<ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 		

HOUSING MATERIAL/FINISH	MOUNTING	End View
<ul style="list-style-type: none"> Aluminum housing. Glass toughened Polyester powder painted housing. Mounting arrangement order separately if required 	<p>This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required</p>	<p>End View</p> 

GVE Order Code No	A Length	B-Width	C- Height	Weight	Watt	TJ	Price
GVE - 50 ECO WFL CL	200	150	30	1.1	50	75	1990
GVE - 100 ECO WFL CL	280	210	30	2.0	100	80	2890

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

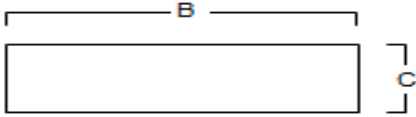
DOC No.: GVE FL /A-9 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

LED Flood light Sleek Model Down Choke with Frame outdoor applications high-quality LED light.

<p align="center">FEATURES</p> <ul style="list-style-type: none"> Flat Design Enhanced, uniform lighting Standard low voltage DC 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200 Watt configurations For use in bracket/wall mounting Easy maintenance 	<p align="center">APPLICATIONS</p> <ul style="list-style-type: none"> Farm House Park Outdoor Application Stadium 	<p align="center">PICTORIAL IMAGE</p> 
--	--	--

<p align="center">OPTICAL SYSTEM</p> <p>Front cover toughened glass offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>		<p align="center">DIMENSIONS</p> <p align="center">Top View</p> 
<p align="center">ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p align="center">WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	

<p align="center">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Glass toughened Polyester powder painted housing. Mounting arrangement order separately if required 	<p align="center">MOUNTING</p> <p>This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required</p>	<p align="center">End View</p> 
---	---	--

GVE Order Code No	A Length	B-Width	C- Height	Weight	Watt	TJ	Price
GVE - 50 WFL FR M	200	225	55	1.4	50	75	1800
GVE - 100 WFL FR M	270	280	70	2.2	100	80	2700
GVE - 150 WFL FR M	390	300	75	3.2	150	80	3700
GVE - 200 WFL FR M	390	300	75	4.1	200	80	4890

Input AC	Power Factor	Lumen / watt	Beam Angle	Hamonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS







GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

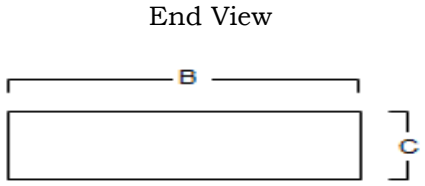
1- Spec sheet Documents GVE LED Street Light frame model
 /A-28 Issue No: 01, Revision No: 02, Dated: 01/04/2020

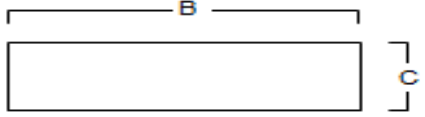
PRODUCT DATA

LED Street light with Frame outdoor applications high-quality LED light.

<p>Pole mounted Street light Frame model Type Design</p> <ul style="list-style-type: none"> Enhanced, uniform lighting Standard low voltage DC 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200 Watt configurations For use Pole and wall mounting Easy maintenance 	<p align="center">APPLICATIONS</p> <ul style="list-style-type: none"> Farm House Park Outdoor Application Stadium etc 	<p align="center">PICTORIAL IMAGE</p> 
---	--	--

<p align="center">OPTICAL SYSTEM</p> <p>Front cover toughened glass offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>	<p align="center">DIMENSIONS</p> <p align="center">Top View</p> 
---	--

<p align="center">ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p align="center">WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
---	---	--

<p align="center">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Glass toughened Polyester powder painted housing. Mounting arrangement order separately if required 	<p align="center">MOUNTING</p> <p>This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required</p>	<p align="center">End View</p> 
---	---	--

GVE Order Code No	A-Length	B-Width	C- Height	Watt	TJ	Environment	Price
GVE-25 WSL FF BAN	275	120	50	25	75	Green ECO	1690
GVE-50 WSL FF BAN	360	140	50	50	75	Green Eco	2590
GVE-100 WSL FF BAN	455	210	60	100	80	Green ECO	5290
GVE-150WSL FF BAN	590	320	70	150	80	Green ECO	7900
GVE-200 WSL FF BAN	590	320	70	200	80	Green ECO	9900

Input AC	Power Factor	Lumen / watt	Beam Angle	Hamonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS



GVE OVERSEAS PVT.LTD

PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

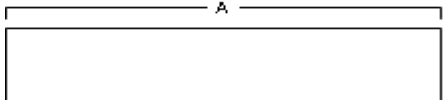


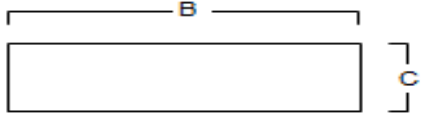
1- Spec sheet Documents GVE LED Street Light Glass model
/A-29 Issue No: 01, Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

Glass Model LED Street light outdoor applications high-quality LED light.

<p>Pole mounted Street light Glass model Type Design</p> <ul style="list-style-type: none"> Enhanced, uniform lighting Standard low voltage DC 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200 Watt configurations For use Pole and wall mounting Easy maintenance 	<p>APPLICATIONS</p> <ul style="list-style-type: none"> Farm House Park Outdoor Application Stadium etc 	<p>PICTORIAL IMAGE</p> 
---	---	---

<p>OPTICAL SYSTEM</p> <p>Front cover toughened glass offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>	<p>DIMENSIONS</p> <p>Top View</p> 
--	---

<p>ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	<p>End View</p> 
--	--	---

<p>HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Glass toughened Polyester powder painted housing. Mounting arrangement order separately if required 	<p>MOUNTING</p> <p>This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required</p>	
--	--	--

GVE Order Code No	A-Length	B-Width	C- Height	Watt	TJ	Wight In KG	Price
GVE-25 WSL FG	275	120	50	25	75	1.1	1290
GVE-50 WSL FG	360	140	50	50	75	1.4	2290
GVE-100 WSL FG	390	210	60	100	80	2.4	4890
GVE-150WSL FG	455	300	70	150	80	4.1	6590
GVE-200 WSL FG	455	300	70	200	80	4.1	8900

Input AC	Power Factor	Lumen / watt	Beam Angle	Hamonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS





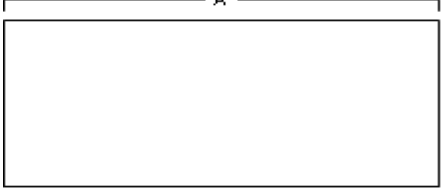
GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- LED FLOOD LIGHT SERIES

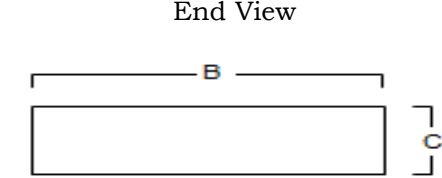
29 Spec sheet Documents GVE Glass Exit Sign
/A-50-4 W Issue No: 01, Revision No: 02, Dated: 01/04/2020

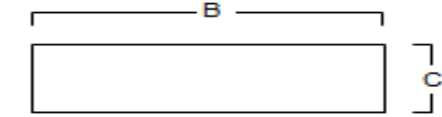
PRODUCT DATA

LED Exit sign for indoor applications high-quality LED light.

<p>Glass Exit Design Surface mounting Easy maintenance</p>	<p>APPLICATIONS Corridor Exit door Path for exit</p>	<p>PICTORIAL IMAGE</p> 
---	---	---

<p align="center">OPTICAL SYSTEM</p> <p>LED light back side of the Glass offers high levels of efficiency and visual comfort. Soft, low glare, indirect illumination light distribution.</p>	<p align="center">DIMENSIONS</p> <p align="center">Top View</p> 
---	--

<p>ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
--	--	--

<p>HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Glass toughened Polyester powder painted housing. Mounting arrangement order separately if required 	<p>MOUNTING</p> <p>This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required</p>	<p align="center">End View</p> 
--	--	---

GVE Order Code No	A Length	B-Width	C- Height	Weight	Watt	TJ	Emergency backup e
GVE EMG 4 W EXIT	289	200	44	2.1	4	80	90 Minute

Battery pack - Lithium-ion – 12 Volt 900 MAH

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	90	Less 20 %	20	Glass& MS	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD

PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

60 Linear Flood light - DOC No.: GVE Surface /Hanging A-60 Issue No: 01,
Revision No: 02, Dated: 01/04/2020

PRODUCT DATA

LED Street light with Frame outdoor applications high-quality LED light.

Wall / Pole Mounted

- Enhanced, uniform lighting
- Standard low voltage DC
- 80+ CRI, Available in Bracket mounted LED flood light 50,100,150,200,300.400 Watt configurations For use Pole and wall mounting Easy maintenance

APPLICATIONS

- Farm House
- Park
- Outdoor Application
- Stadium etc

PICTORIAL IMAGE



OPTICAL SYSTEM

High levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.



ELECTRICAL

- Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination.
- Rated to deliver LM80 Performance > 50,000 hours

WARRANTY

2 year limited warranty.
Visit our site as below:
www.greenvisionsenterprises.co.in

HOUSING MATERIAL/FINISH

- Aluminum housing.
- Polyester powder painted housing.
- Mounting arrangement order separately if required

MOUNTING

This luminaire has been provided. Bracket Holes for support to structure mounting arrangement order separately if required



GVE Order Code No	Length MM	Width MM	Height MM	Watt	TJ	Environment	Price
GVE- 50 W Linea FL	240	100	40	50	75	Green ECO	2850
GVE- 100 W Linea FL	480	100	40	100	75	Green ECO	5500
GVE- 150 W Linea FL	720	100	40	150	75	Green ECO	8500
GVE- 200 W Linea FL	480	200	40	200	75	Green ECO	11900
GVE- 300 W Linea FL	720	200	40	300	75	Green ECO	18900
GVE- 400 W Linea FL	960	200	40	400	75	Green ECO	24500

Input AC	Power Factor	Lumen / watt	Beam Angle	Hamonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	120	Less 20 %	65	Aluminum	50000 Hour	Seoul,Osram

REGISTRATIONS & APPROVALS





GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET- STREET LIGHT POLE MOUNTED SERIES

1- Spec sheet Documents GVE Hanging / Surface SYL light IP -20

PRODUCT DATA

1- LED COB Hanging / Surface SYL light IP -20

<p>Surface Design Track Light</p> <ul style="list-style-type: none"> Enhanced, uniform lighting 6-20 Watt 	<p>APPLICATIONS INDOOR</p> <ul style="list-style-type: none"> Office Areas Retail Stores Classrooms Hospitals Nursing Homes Museum Painting 	<p>PICTORIAL IMAGE</p>
--	---	-------------------------------

<p align="center">OPTICAL SYSTEM</p> <p>Offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, while maintaining high-efficiency and a wide, uniform light distribution..</p>	
---	--

<p>ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p>WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
--	--	--

<p>HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Aluminum housing. Powder coating optional on request 	<p>MOUNTING</p> <p>Surface</p>	
---	---------------------------------------	--

GVE Order Code No	Dia MM	Height MM	Watt	Price			
GVE HAG/SUR-7 W	60	85	7	950			
GVE HAG/SUR-12W	73	105	12	1390			
GVE HAG/SUR-20W	93	110	20	1660			

Input AC	Power Factor	Lumen / watt	Beam Angle	Harmonics	IP Rating	Housing	Expected Life	LED Make
230	.90	130	45	Less 20 %	20	Aluminum	50000 Hour	Seoul /Edison

REGISTRATIONS & APPROVALS






GVE OVERSEAS PVT.LTD
PRODUCT DATA SHEET HEXA SUR/HAG SERIES

DOC No.: HEXA-1 GVE/PDS/SRSE/02, Issue No: 02, Revision No: 01, Dated:
01/04/2020

PRODUCT DATA

Commercial-grade, Surface / Hanging with New generation styling and high visual comfort feature, flat PC diffuser indoor applications where low-glare high-quality LED light.

<p align="center">FEATURES</p> <ul style="list-style-type: none"> Flat Design Enhanced, uniform lighting PC lens Standard low voltage DC 80+ CRI Available in 4x1 configurations For use in recess ceilings Easy maintenance from front side 	<p align="center">APPLICATIONS</p> <ul style="list-style-type: none"> Office Areas Retail Stores Classrooms Hospitals Nursing Homes <p align="center">ADDITIONAL OPTIONS</p> <ul style="list-style-type: none"> Emergency lighting battery pack 	<p align="center">PICTORIAL IMAGE</p> 
<p align="center">OPTICAL SYSTEM</p> <p>Frosted acrylic diffuser, offers high levels of efficiency and visual comfort. Indirect reflectors are precision formed and contoured to provide soft, low glare, indirect illumination, while maintaining high-efficiency and a wide, uniform light distribution.</p>		<p align="center">DIMENSIONS Top View</p>
<p align="center">ELECTRICAL</p> <ul style="list-style-type: none"> Enhanced Long life LEDs coupled with high efficiency drivers provide quality illumination. Rated to deliver LM80 Performance > 50,000 hours 	<p align="center">WARRANTY</p> <p>2 year limited warranty. Visit our site as below: www.greenvisionsenterprises.co.in</p>	
<p align="center">HOUSING MATERIAL/FINISH</p> <ul style="list-style-type: none"> Mild steel housing. CRCA Sheet White, polyester powder painted housing. 	<p align="center">MOUNTING</p> <p>This luminaire has been provided. Holes for chain-mounting support to building structure</p>	<p align="center">End View</p>

Model No- Order Code	Watt	LUMEN/ watt	CC mA	VOLTAGE AC-In	VOLTAGE DC-Out
GVE HEXA 300 MM	30	100	800-1000	185-275	32-60
GVE HEXA 450 MM	40	100	800-1000	185-275	32-60
GVE HEXA 600 MM	60	100	800-1000	185-275	32-60
GVE HEXA 900 MM	80	100	800-1000	185-275	32-60
GVE HEXA 1200 MM	120	100	800-1000	185-275	32-60

Description TABLE-MODEL WISE

	EFFICACY %	CRI	CCT		
	80	80>	3000	4000	5500
	80	80>	3000	4000	5500
	80	80>	3000	4000	5500

REGISTRATIONS & APPROVALS

